




Spring Vibration Isolators

3-inch Rated Deflection • YRS-E1 • YRS-E2 • YRS-E4

Tomahawk's 3-inch rated deflection, welded steel housing and restrained vibration isolators, YRS-E, consist of laterally stable, free standing, large diameter springs, with horizontal stiffness of at least 1.0 times the rated vertical stiffness with 50% overload capacity. The steel housing assemblies limit vertical movements of the equipment under isolation by the travel limit stop studs and the side support frames. The spring elements are assembled with top plate, spring mount plate, level adjustment nuts and base plate with acoustical pads. Bolting holes are provided in bottom base plate. Thanks for the high deflection (3-inch) design YRS-E models are typically recommended for equipment that undergo large amount of fluid load changes during service or maintenance near critical areas, such as chillers, boilers and cooling towers. For equipment installed in large floor span areas or on roof tops the 3-inch deflection YRS-E isolators are best suited to compensate for the deflection of the floor structure and resistance of strong wind load.

Specifications

Restraint vibration isolator shall be of welded steel housing assemblies and consist of top load plate, with travel limit studs, spring cap or spring mount plate, level adjusting nuts and base plate with acoustical pad. Bolting holes are provided in base plate. Steel housing assemblies, level adjust nuts, locking screws and washers shall be hot-dipped galvanized as standard. Springs shall be free standing, large diameter with horizontal stiffness of at least 1.0 times the rated vertical stiffness and provide 50% overload capacity. Springs shall be color epoxy powder coated for corrosion resistance and load identification.

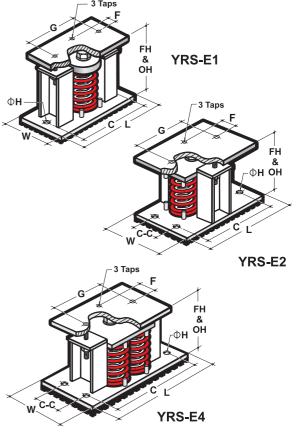

MODEL	IMPERIAL UNITS				METRIC UNITS			DIMENSION (mm)								
	Rated Load (lbs.)	Rated Defl. (in.)	Spring Rate (lbs./in.)	COLOR CODE	Rated Load (kg)	Rated Defl. (mm)	Spring Rate (kg/mm)	FH & OH	٦	W	С	c-c	F	G	Taps	ФН
YRS-E1-200	200	3.00	66,67	green	90.7	76.2	1.19									
YRS-E1-240	240	3.00	80.00	dark blue	108.9	76.2	1.43									
YRS-E1-300	300	3.00	100.00	white	136.1	76.2	1.79									
YRS-E1-400	400	3.00	133.33	dark green	181.5	76.2	2,38	260	250	100	210	-	35	100	3 x	2 x
YRS-E1-450	450	3.00	150.00	yellow	204.2	76.2	2.68							''	M12	Ф16
YRS-E1-500	500	3.00	166.67	red	226.9	76.2	2.98 3.57									
YRS-E1-600 YRS-E1-700	600 700	3.00	200.00 233.33	tan	272,2 317,6	76.2 76.2	3.57 4.17									
YRS-E1-700 YRS-E1-800	800	3.00 3.00	233.33 266.67	grey green	363.0	76.2	4.17									_
YRS-E1-1150	1150	3.00	383.33	orange	521.8	76.2	6.85									
YRS-E1-1130	1400	3.00	466.67	black	635.2	76.2	8,34								3 x	2 x
YRS-E1-1600	1600	3.00	533,33	brown	726.0	76.2	9.53	290	280	130	240	-	35	100	M12	Ф16
YRS-E1-1900	1900	3.00	633.33	dark green	862.1	76.2	11,31								10112	+ 10
YRS-E1-2500	2500	3.00	833.33	blue	1134.3	76.2	14.89									
YRS-E1-2800	2800	3.00	933.33	red	1270.4	76.2	16.67									
YRS-E1-3000	3000	3.00	1000.00	dark blue	1361.2	76.2	17.86	220	000	400	000	400		400	3 x	2 x
YRS-E1-3500i	3500	3.00	1166.67	d. blue + yellow	1588.0	76.2	20.84	330	300	160	260	130	50	100	M12	Ф16
YRS-E1-4000	4000	3.00	1333.33	brown	1814.9	76.2	23.82									
YRS-E1-4500	4500	3.00	1500.00	black	2041.7	76.2	26.79								3 x	2 x
YRS-E1-5000	5000	3.00	1666.67	green	2268.6	76.2	29.77	350	360	200	320	160	50	100	M12	Ф16
YRS-E1-5500	5500	3.00	1833.33	grey	2495.5	76.2	32.75									
YRS-E2-5600	5600	3.00	1866.67	red	2540.8	76.2	33.34	250	100	250	360	100	50	100	3 x	4 x
YRS-E2-6000	6000	3.00	2000.00	dark blue	2722.3	76.2	35.73	350	400	250	360	100	50	100	M12	Ф16
YRS-E2-7000	7000	3.00	2333.33	d. blue + yellow	3176.0	76.2	41.68									
YRS-E2-8000 YRS-E2-9000	8000 9000	3.00	2666.67 3000.00	brown black	3629.8 4083.5	76.2 76.2	47.63 53.59									
YRS-E2-9000 YRS-E2-10000	10000	3.00 3.00	3333.33	1	4537.2	76.2	59,54	350	450	300	410	100	50	100	3 x	4 х Ф16
YRS-E2-10000 YRS-E2-11000	11000	3.00	3666,67	green grey	4990.9	76.2	65,50								M12	Ψισ
YRS-E4-11200	11200	3.00	3733.33	red	5081.7	76.2	66.69								3 x	4 x
YRS-E4-12000	12000	3.00	4000.00	dark blue	5444.6	76.2	71.45	350	460	320	420	120	50	100	M12	Ф16
YRS-E4-14000 YRS-E4-16000	14000 16000	3.00	4666.67 5333.33	d. blue + yellow brown	6352.1 7259.5	76.2 76.2	83.36 95.27									
YRS-E4-16000 YRS-E4-18000	18000	3.00 3.00	6000.00	brown	7259.5 8167.0	76.2	107,18									
YRS-E4-18000 YRS-E4-20000	20000	3.00	6666.67	green	9074.4	76.2	119.09	370	540	400	500	250	50	100	3 x	4 x
YRS-E4-22000	22000	3.00	7333,33	grey	9981.9	76.2	131.00	3/0	340	400	300	200	50	100	M12	Ф16
2 . 22000		0.00	. 000,00	9,0,	300.10	, 0,2	.0.100									